Quantum Information and Computation, Vol. 1, No. 0 (2001) 000–000
© Rinton Press

arXiv:1206.6550v1 [quant-ph] 28 Jun 2012

Wavelength attack scheme on continuous-variable quantum key distribution system using heterodyne protocol

Jing-Zheng Huang, Zhen-Qiang Yin[*], Shuang Wang, Hong-Wei Li, Wei Chen, Guan-Can Guo and Zheng-Fu Han[†]
Key Laboratory of Quantum Information, University of Science and Technology of China, No.96 JinZhai Road
Hefei, 230026, China

Received (received date)
Revised (revised date)

The security proof of continuous variable quantum key distribution(CV QKD) based on two assumptions that the eavesdropper can neither act on the local oscillator nor control Bob's beam splitter. These assumptions maybe invalid in practice due to some potential imperfections of the implementations of the protocol. In [$Phys.Rev.A, 84.062308$], we found that one can control the intensity transmission of the beam splitter by switching the wavelength of the input light. In this paper, we revisit the problem of transmitting the local oscillator in public channel, and propose a wavelength attack targeting the CV QKD systems using heterodyne protocol. Our attack is proved to be feasible and renders all final key shared between the legitimate parties insecure even they have monitored the intensity. To prevent our attack, a wavelength filter should be added before performing the heterodyne detection.

Keywords: The contents of the keywords

Communicated by: to be filled by the Editorial

1. Introduction

Quantum key distribution(QKD) enables two distant partners, Alice and Bob, to share common secret keys in the present of an eavesdropper, Eve[1]. In theory, the security of QKD protocol is solely based on the laws of physics[2, 3]. But in practice, the key components of practical QKD system exist imperfections that do not fulfill the assumptions of ideal devices in these security proofs. In the discrete-variable(DV) QKD(e.g. the BB84 protocol[4]), the imperfect devices such as single photon detector, phase modulator, Faraday mirror and fiber beam splitter open security loopholes to Eve and lead to various types of side-channel attacks[5]-[11].

The continuous-variable(CV) QKD[12, 13] suffers the similar problems. In the CV-QKD protocols, Alice encodes the key information into the quadratures, X and P, of a weak coherent or squeezed state and sends it to Bob. Bob measures one or both quadratures by performing homodyne or heterodyne detection(corresponding to the homodyne protocol[12] and heterodyne protocol[13], respectively) on the signal with a relative strong local oscillator(LO). Finally, they perform direct or reverse reconciliation and privacy amplification process to distill a common secret key. In practice, it is extremely difficult for Bob to generate the LO with the same initial polarization and phase to the signal. So that Alice prepares both the signal and LO, and sent them to Bob in the same fiber channel at the same time to avoid the large drifts of the relative polarization and phase[15]. However, this implementation leaves a security loophole to Eve. In Ref.[20], the authors proposed a powerful equal-amplitude attack. To perform this attack, Eve first intercepts the signal and LO, and measures both of the quadratures by performing heterodyne detection on them. According to her measurement results, she reproduces two weak squeezed states which have the same intensity level to the signal, and sends them to Bob. Bob treats these two fake states as signal and LO, and performs detections on them as usual. But now the detection is neither homodyne nor heterodyne detection, therefore Eve is able to make the extra noise of Bob's measurement much lower than the shot noise level. In consequence, the total deviation between Bob's measurement and Alice's preparation is lower than the tolerable threshold derived from the theoretical security proofs[17, 18], hence Alice and Bob can not discover the presence of Eve.

---

[*] To whom correspondence should be addressed, Email: yinzheqi@mail.ustc.edu.cn.
[†] To whom correspondence should be addressed, Email: zfhan@ustc.edu.cn

In order to prevent this attack without modifying the origin measurement setup, Bob needs to monitor the total intensity or the LO intensity[20]. We note that in this attack, Eve is assumed to be not able to control the beam splitters of Bob. But in one of our recent study[11], we found that it is possible for Eve to control the outputs of fiber beam splitters by utilizing its wavelength dependent property[21]-[23]. Making use of this loophole, we propose a new wavelength attack on the practical CV-QKD system using heterodyne detection protocol[13]. By using this attack Eve can in principle achieve all of the secret key without being discovered, even if Bob has monitored the total intensity or the LO intensity.

In the security analysis of CV-QKD protocols, $V_{A|B}$, Alice's conditional variance of Bob, has the similar status as the quantum bit error rate(QBER) in the DV-QKD protocols. To prove that the hidden Eve would not be discovered in our attack, our method is proving that the upper bound of $V_{A|B}$ under wavelength attack is always lower than the maximum value allowed by the secret key rate formula[13, 18].

This paper is organized as follows. In section 2, we first rapidly review the heterodyne protocol and the wavelength-dependent property of fiber beam splitter, then we propose a wavelength attack scheme on an all-fiber CV-QKD system using heterodyne protocol in section 3. We prove the feasibility of this wavelength attack in section 4, and finally conclude this paper in section 5.

2. Preliminary

2.1. *Heterodyne protocol*

In the heterodyne protocol, Alice first prepares a displaced vacuum state that will be sent to Bob. This is realized by choosing two real numbers X_A and P_A from a Gaussian distribution of variance V_0 and zero mean. Bob receives this coherent state and simultaneously measures both the amplitude and phase quadratures of the state by a heterodyne detection. After repeating this process many times, they finally extract a binary secret key by using reverse reconciliation algorithm[14]. A typical CV-QKD system using heterodyne protocol can be realized by the scheme shown in Fig.1[24]. In this scheme, time and polarization multiplexing are used so that the signal and LO can be transmitted in the same channel without interfering.

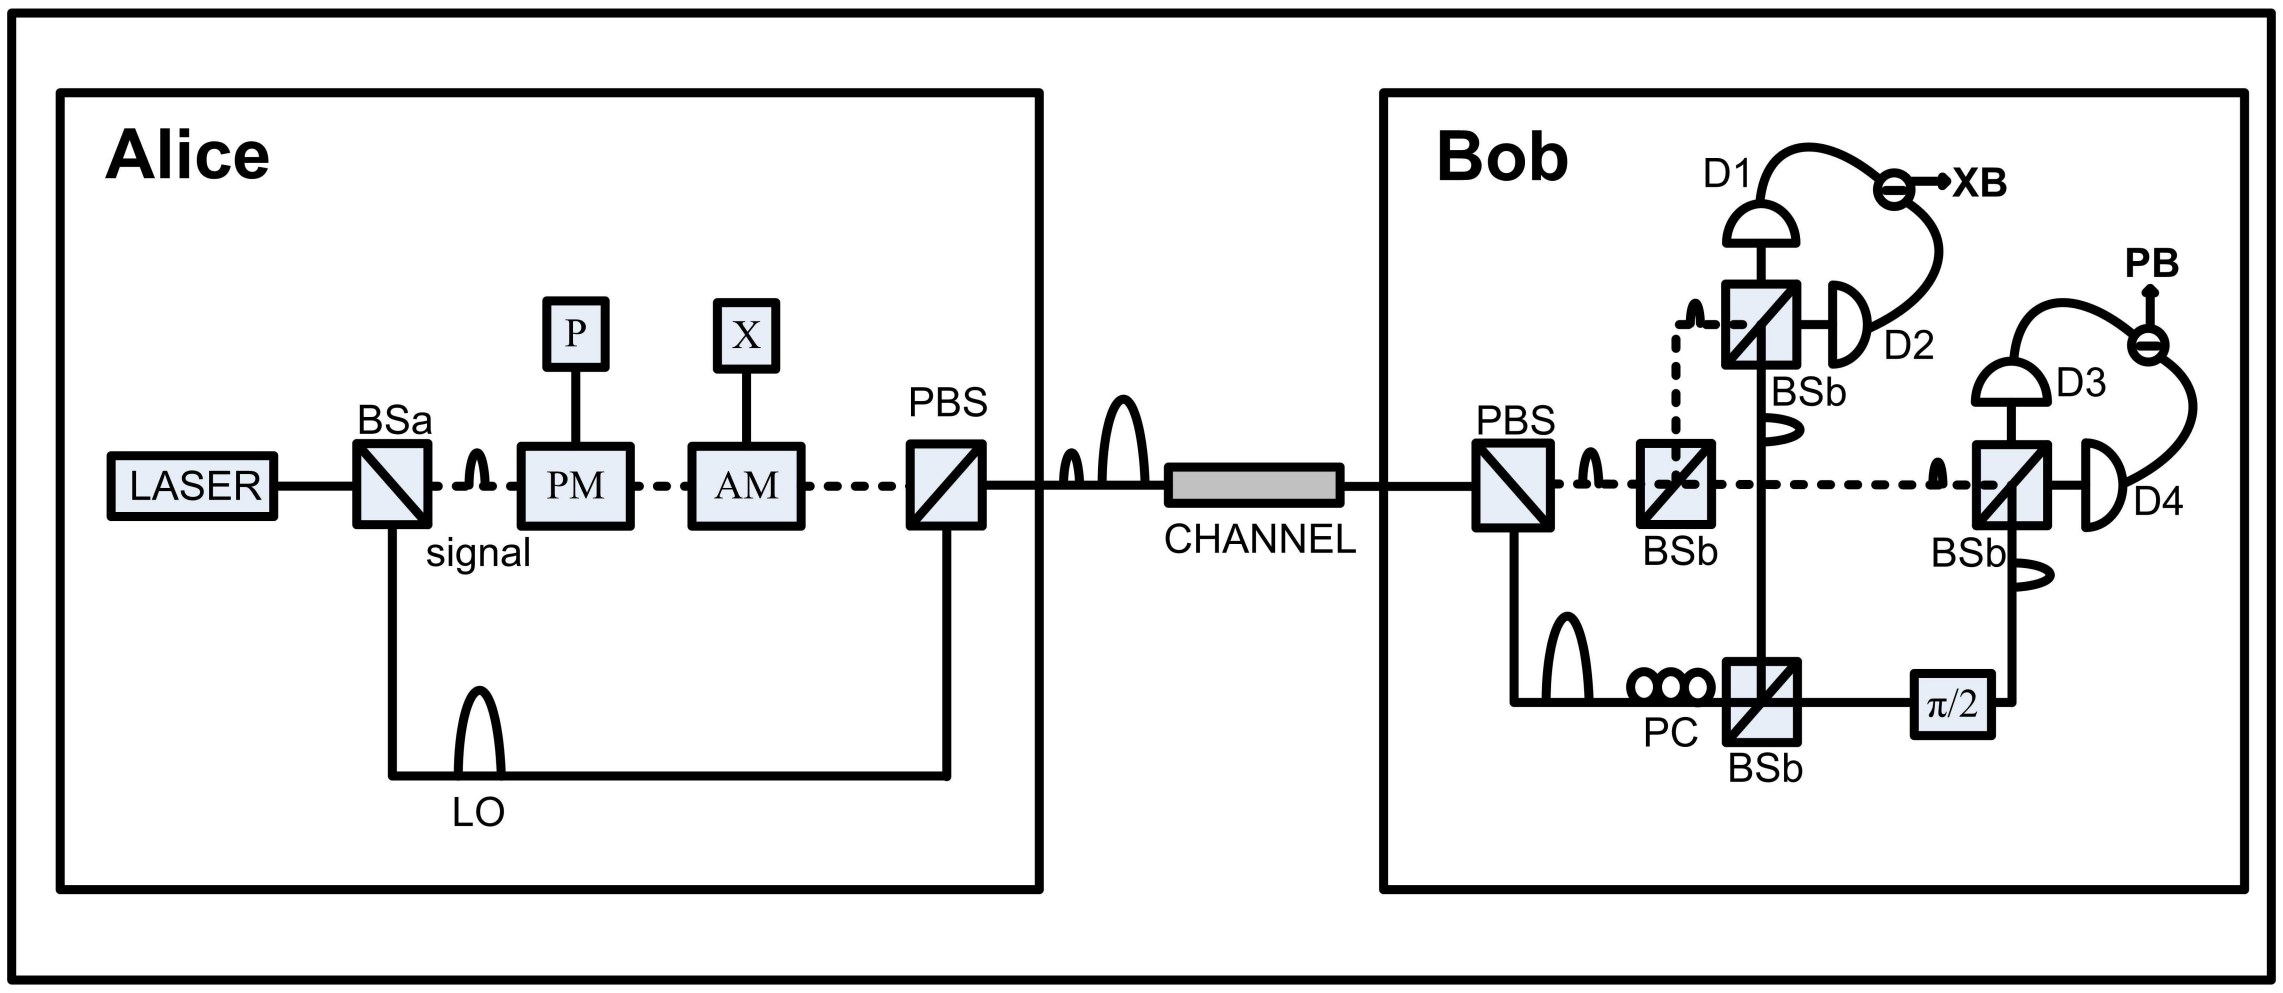

Fig. 1. The schematic diagram of heterodyne detection protocol. BSa:1/99 beam splitter; BSb: 50/50 beam splitter; PM: phase modulator; AM: amplitude modulator; PBS: polarization beam splitter; PC: polarization controller. Alice generates coherent light pulses by a 1550nm laser diode, then separates them into a weak signal and a strong LO by a 1/99 beam splitter. The signal is then modulated randomly following the centered Gaussian distribution in both quadratures, by using phase and amplitude modulators. The signal and LO are separated in time and modulated into orthogonal polarizations by the PBS before inserting to the channel.

To perform the heterodyne detection, Bob uses the photo-detector to convert the photons into photocurrent $\hat{i}$. $\hat{i}$ and the photon number $\hat{n}$ are related by $\hat{i} = q\hat{n} = q\hat{a}^\dagger\hat{a}$, where $\hat{a}$ and $\hat{a}^\dagger$ are the annihilation and creation operators of the light state, and q is a suitable constant[27].

The consequence of using heterodyne detection is that vacuum noise is introduced into Bob's measurements via the 50-50 BS at his station. To show this, let us first describe the signal and LO by operators $\hat{a}_s$ and a complex amplitude α_{LO} respectively. The vacuum noises insert to these states from the Bob's BS, and convert the signal and LO to be:

$$\begin{aligned} &\hat{a}_s \to \hat{a}_s + \hat{N}_s, \\ &\alpha_{LO} \to \alpha_{LO} + \hat{N}_{LO}. \end{aligned} \tag{1}$$

Where $\hat{N}_s$ and $\hat{N}_{LO}$ describe the vacuum noises insert to the signal and LO. Therefore, the photocurrents read by the four photo-detectors can be written as follows:

$$\begin{aligned} \hat{i}_1 &= q(\alpha^*_{LO} + \hat{N}^\dagger_{LO} + \hat{a}^\dagger_s + \hat{N}^\dagger_s)(\alpha_{LO} + \hat{N}_{LO} + \hat{a}_s + \hat{N}_s)/4, \\ \hat{i}_2 &= q(\alpha^*_{LO} + \hat{N}^\dagger_{LO} - \hat{a}^\dagger_s - \hat{N}^\dagger_s)(\alpha_{LO} + \hat{N}_{LO} - \hat{a}_s - \hat{N}_s)/4, \\ \hat{i}_3 &= q[e^{-i\frac{\pi}{2}}(\alpha^*_{LO} + \hat{N}^\dagger_{LO}) + \hat{a}^\dagger_s + \hat{N}^\dagger_s][e^{i\frac{\pi}{2}}(\alpha_{LO} + \hat{N}_{LO}) + \hat{a}_s + \hat{N}_s]/4, \\ \hat{i}_4 &= q[e^{-i\frac{\pi}{2}}(\alpha^*_{LO} + \hat{N}^\dagger_{LO}) - \hat{a}^\dagger_s - \hat{N}^\dagger_s][e^{i\frac{\pi}{2}}(\alpha_{LO} + \hat{N}_{LO}) - \hat{a}_s - \hat{N}_s]/4. \end{aligned} \tag{2}$$

For simplicity, we assume that α_{LO} is a real number. To derive the quadratures X and P, the difference photocurrents should be measured:

$$\begin{aligned}
\delta\hat{i}_x &= i_1 - i_2 \approx q(\alpha_{LO}\hat{a}_s^\dagger + \alpha_{LO}\hat{a}_s + \alpha_{LO}\hat{N}_s^\dagger + \alpha_{LO}\hat{N}_s)/2 \\
&= q\alpha_{LO}(\tfrac{\hat{a}_s+\hat{a}_s^\dagger}{2} + \tfrac{\hat{N}_s+\hat{N}_s^\dagger}{2}) \\
&= q\alpha_{LO}(\hat{X} + \hat{N}_{s,x}), \\
\rightarrow \hat{X}_B &= \tfrac{\delta\hat{i}_x}{\sqrt{2}q\alpha_{LO}} = \tfrac{1}{\sqrt{2}}\hat{X} + \tfrac{1}{\sqrt{2}}\hat{N}_{s,x}, \\
\\
\delta\hat{i}_p &= i_3 - i_4 \approx q(i\alpha_{LO}\hat{a}_s^\dagger - i\alpha_{LO}\hat{a}_s + i\alpha_{LO}\hat{N}_s^\dagger - i\alpha_{LO}\hat{N}_s)/2 \\
&= q\alpha_{LO}(\tfrac{\hat{a}_s-\hat{a}_s^\dagger}{2i} + \tfrac{\hat{N}_s-\hat{N}_s^\dagger}{2i}) \\
&= q\alpha_{LO}(\hat{P} + \hat{N}_{s,p}), \\
\rightarrow \hat{P}_B &= \tfrac{\delta\hat{i}_p}{\sqrt{2}q\alpha_{LO}} = \tfrac{1}{\sqrt{2}}\hat{P} + \tfrac{1}{\sqrt{2}}\hat{N}_{s,p},
\end{aligned} \tag{3}$$

where $\hat{X} = \frac{\hat{a}_s+\hat{a}_s^\dagger}{2}$ and $\hat{P} = \frac{\hat{a}_s-\hat{a}_s^\dagger}{2i}$ are the exact quadratures that Bob wants to measure, and $\delta\hat{X}$ and $\delta\hat{P}$ are the quadrature operators of the vacuum noise entering into Bob's BS. The vacuum noise introduced by the heterodyne detection can be calculated by:

$$\begin{aligned}
N_x = \langle(\hat{X}_B - \hat{X})^2\rangle = \langle(\hat{N}_{s,x})^2\rangle, \\
N_p = \langle(\hat{P}_B - \hat{P})^2\rangle = \langle(\hat{N}_{s,p})^2\rangle.
\end{aligned} \tag{4}$$

Following the Heisenberg uncertainty relation $\langle(\hat{N}_{s,x})^2\rangle\langle(\hat{N}_{s,p})^2\rangle \geq N_0^2$ and the property of coherent state[28], we can derive that the vacuum noise introduced by the heterodyne detection reaches the shot noise level, i.e. $N_x = N_p = N_0$.

Under the assumption that Eve can not act on LO (it is a basic assumption in the security proofs), only if the excess noise reaches two times of the shot noise level that Eve can perform an intercept-resend attack on the channel[16]. It is due to the fact that Eve will introduce vacuum noise in the heterodyne detection and suffer the quantum fluctuation when she reproduces the signal state in a simple intercept-resend attack.

2.2. *Wavelength-dependent fiber beam splitter*

In Ref.[11], we studied the wavelength-dependent property of the fiber beam splitter(BS) which is made by the fused biconical taper (FBT) technology [21]. The fused biconical taper beam splitter(FBT BS) is made by closing two or more bare optical fibers, fusing them in a high temperature environment and drawing their two ends at the same time, then a specific biconic tapered waveguide structure can be formed in the heating area. The FBT BS is widely use in the fiber QKD systems because of the feature of low insertion loss, good directivity and low cost. However, intensity transmission of the FBT BS is wavelength-dependent, and most types of the FBT BS work only in a limited range of wavelength (limited bandwidth), where the intensity transmission of the BS can be defined as $T \equiv \frac{I_{port1}}{I_{port1}+I_{port2}}$, I_{port1} (I_{port2}) is output light intensity from BS's output port 1 (output port 2). Typical coupling ratio at the center wavelength provides optimal performance, but the intensity transmission varies periodically with wavelength changes. The relationship between wavelength λ and the intensity transmission T by using the coupling model is given in Ref.[22, 23]:

$$T = F^2 sin^2(\tfrac{Cw\lambda^{2.5}}{F}) \equiv T(\lambda). \tag{5}$$

where F^2 is the maximal power that is coupled, C is the coupling coefficient, w is the heat source width.

3. Wavelength Attack on a CV QKD system using heterodyne protocol

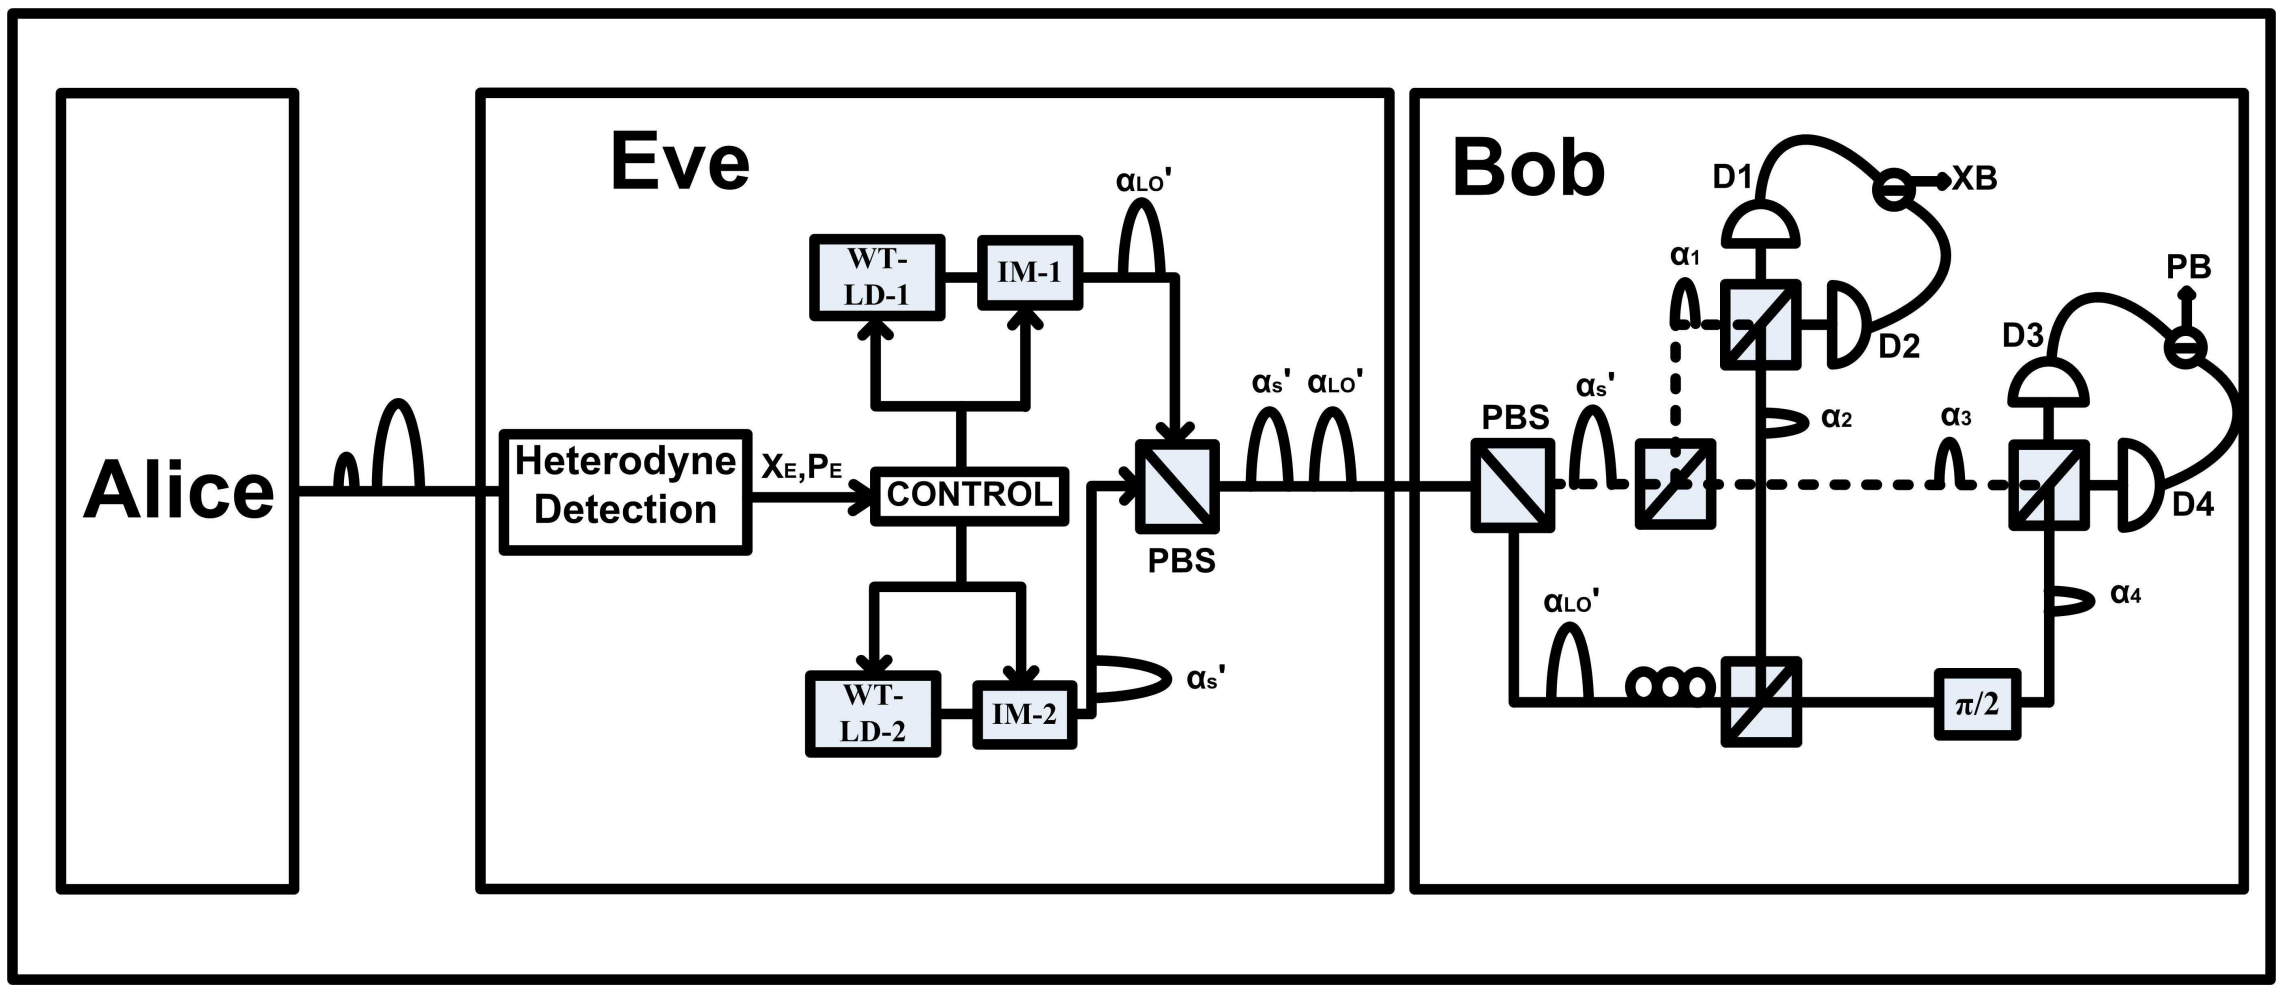

Fig. 2. The schematic diagram of the wavelength attack scheme. WT-LD: the wavelength tunable laser diode; IM: the intensity modulator. The WT-LD and IM are used in producing fake coherent states with the specific wavelength and amplitude set by the controller.

The basic idea of the wavelength attack is shown in Fig.2. Eve intercepts the coherent states sent by Alice. She makes heterodyne measurement of the signal and LO to achieve the quadrature values X_E and P_E. After that, Eve generates and re-sends two coherent states: a fake signal state $|\alpha'_s\rangle$ and a fake LO state $|\alpha'_{LO}\rangle$. Different from the previous IR attack, these two fake states have different wavelengthes, and we denote them as λ_1 (for $|\alpha'_s\rangle$) and λ_2(for $|\alpha'_{LO}\rangle$). According to Eq.(5), the performance of Bob's BS is dependent to the wavelength of the incoming light. Therefore to the fake signal with wavelength λ_1, the density transmission of Bob's BS is determined by function $T(\lambda_1)$ which is defined in Eq.(5). Similarly, the density transmission of Bob's BS to the fake LO state is determined by $T(\lambda_2)$. In other words, Eve can control Bob's BS by tuning the wavelength of her fake states.

With the help of the wavelength tunable laser diodes and intensity modulators, the wavelength and amplitude of these fake states are carefully chosen to satisfy the following conditions:

$$\begin{array}{ll} i. & |\alpha'_s|^2 + |\alpha'_{LO}|^2 = |\alpha_{LO}|^2 + |\alpha_s|, \\ ii. & T_1 = T(\lambda_1) \in [0,1], T_2 = T(\lambda_2) \in [0,1], \\ iii. & (1-T_1)(1-2T_1)|\alpha'_{LO}|^2 + (1-T_2)(2T_2-1)|\alpha'_s|^2 = \sqrt{\eta} X_E |\alpha_{LO}|, \\ iv. & T_1(1-2T_1)|\alpha'_{LO}|^2 + T_2(2T_2-1)|\alpha'_s|^2 = \sqrt{\eta} P_E |\alpha_{LO}|, \end{array} \tag{6}$$

where η is the channel transmission efficiency, α_{LO} is the amplitude of the original LO, α'_s and α'_{LO} are the amplitudes of the fake states. T_1 and T_2 are the intensity transmissions of

Bob's BS when the fake signal and fake LO income to it. Eve sends these fake sates to Bob.

Bob gets the quadrature values X_B and P_B by performing heterodyne detection on the fake signal and LO. Notice that the fake signal and the fake LO have different wavelengthes, no interference is involved in the this detection. Even so, once the conditions in Eq.(7) are satisfied, one can find that (details in section 4) the extra noise introduced by Bob's measurement is much lower than the shot noise level, therefore the total noise can be kept under the alarm threshold. Consequently, Eve safely achieves the key information without being discovered.

We must point out that condition 3 and 4 may not always be satisfied because the amplitudes of $\hat{\alpha}'_s$ and $\hat{\alpha}'_{LO}$ are constrained by condition 1. However, the fact that $|\alpha_{LO}|^2 \gg V_E$ makes sure that the probability of dissatisfying condition 3 or 4 is extremely close to zero. For example, assume that Alice chooses $|\alpha_{LO}|^2 = 10^8 N_0$ and $V_A = 100N_0$[15], conditions 3 and 4 can always be satisfied if $|X_E|, |P_E| \leq 10^3\sqrt{N_0}$. Notice that the distribution of X_E and P_E is a Gaussian distribution with variance of $V_E \simeq V_A$, it is easy to calculate the probability of $X_E > 10^3\sqrt{N_0}$ or $P_E > 10^3\sqrt{N_0}$ equals $\mathrm{erfc}(\frac{100}{\sqrt{2}}) \approx 0$, where erfc(x) is the error integral.

The method of monitoring the total intensity is invalid to our attack because the total intensity of the fake states arriving to Bob is the same as the case when Eve is absent. Moreover, the method of monitoring the LO intensity requires a 1:99 BS to split the LO and monitors the minor part. Interestingly, the 1:99 BS is wavelength-dependent if it is also made by the FBT technology. Assume that the intensity transmission of the 1:99 BS switches to T'_1 when $\hat{\alpha}'_{LO}$ incomes, Eve can simply add an extra condition:

$$v. \quad (1 - T'_1)|\alpha'_{LO}|^2 = 0.01|\alpha_{LO}|^2, \tag{7}$$

to make Bob's monitor record of the LO intensity unchanged.

4. Feasibility Analysis

To analyze the feasible of the wavelength attack, we first note that the following assumptions should be satisfied:

(1) This attack is restricted to an all-fiber coherent-state CV QKD using heterodyne protocol.

(2) All of Bob's BS have the same wavelength dependent property, i.e. their intensity transmissions are all determined by Eq.(5) with same parameters. This function and the detection efficiencies of Bob's detectors are both well known by Eve.

(3) Eve has the ability to replace the channel with noiseless fiber, and her detectors have high efficiency and extreme low dark count rate.

In the heterodyne protocol, the secret key rate is given by[18]:

$$R = log_2 \tfrac{V+\eta(1+\chi V)}{\eta(1+\chi V)[\eta(V+\chi)+1]}, \tag{8}$$

where χ is the total added noise refers to the input introduced by[18], $(V-1)N_0$ is Alice's modulation variance.

Another important parameter in the security proof is Alice's conditional variance of Bob's measurement $V_{A|B}$, which can be thought as the uncertainty in Alice's estimates of Bob's quadrature measurement result when reverse reconciliation is in use. In the CV-QKD implements, Alice and Bob use $V_{A|B}$ to estimate the shot noise and modulation imperfections[15].

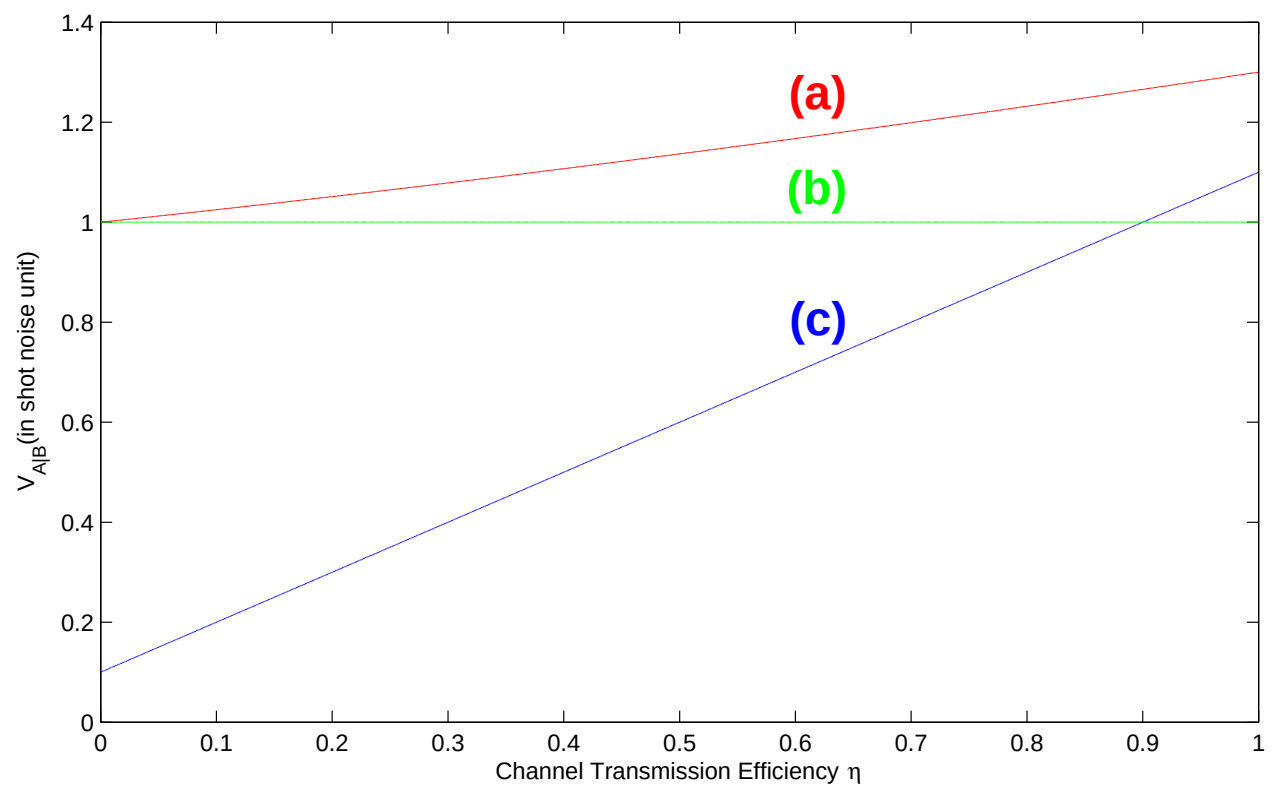

Fig. 3. The relation between the channel transmission efficiency η and the conditional variance $V_{A|B}$ in three situations: (a) the maximum allowable value of $V_{A|B}$ in the security analysis, denoted as $V_{A|B}^{max}$; (b) the value of $V_{A|B}$ in the case of no eavesdropping and the excess noise is negligible, denoted as $V_{A|B}^{normal}$; (c) the value of $V_{A|B}$ in the case of suffering the wavelength attack, denoted as $V_{A|B}^{attack}$. There are two points should be noticed: (1) $V_{A|B}^{attack}$ is smaller than $V_{A|B}^{max}$ towards all transmission efficiencies, hence Alice and Bob can not notice the present of Eve. (2) Eve will also be discovered if $V_{A|B}$ stays below the shot noise level, because it is impossible when the protocol works normally. Therefore Eve should add extra noises to make $V_{A|B}^{attack}$ equals to $V_{A|B}^{normal}$ when $\eta < 0.9$.

$V_{A|B}$ is defined as:

$$\begin{aligned} V_{A|B,x} &= \langle(\hat{X}_B - \sqrt{\tfrac{\eta}{2}}X_A)^2\rangle, \\ V_{A|B,p} &= \langle(\hat{P}_B - \sqrt{\tfrac{\eta}{2}}P_A)^2\rangle. \end{aligned} \tag{9}$$

Because Alice uses coherent state, we have $V_{A|B,x} = V_{A|B,p} = V_{A|B}$. The relation between $V_{A|B}$ and χ is given by[18]:

$$V_{A|B} = \frac{\eta(1+\chi)+1}{2}N_0. \tag{10}$$

Combining with Eq.(8), we can find that for the sake of deriving positive secret key rate, $V_{A|B}$ should be smaller than $V_{A|B}^{max} = \frac{\sqrt{4+\eta^2}+\eta+2}{4}$. In other words, if $V_{A|B}$ is smaller than this threshold, the heterodyne protocol is considered to be secure. Hence we prove our attack feasible by showing that Eve can make $V_{A|B}$ smaller $V_{A|B}^{max}$ when she is performing the wavelength attack. The relation between η and the maximum allowable value of $V_{A|B}$ is drawn in Fig.3(a).

4.1. $V_{A|B}^{normal}$ *in the absent of Eve*

Even in the absent of Eve, $V_{A|B}$ is in the shot noise level because of the vacuum noises introduced by Alice's modulation, the channel loss and Bob's measurement. The evolution of the quadrature value from a real value X_A chosen by Alice to the measurement result $\hat{X}_B$ achieved by Bob is shown in Fig.4 and listed as follows (we write down the quadrature X only

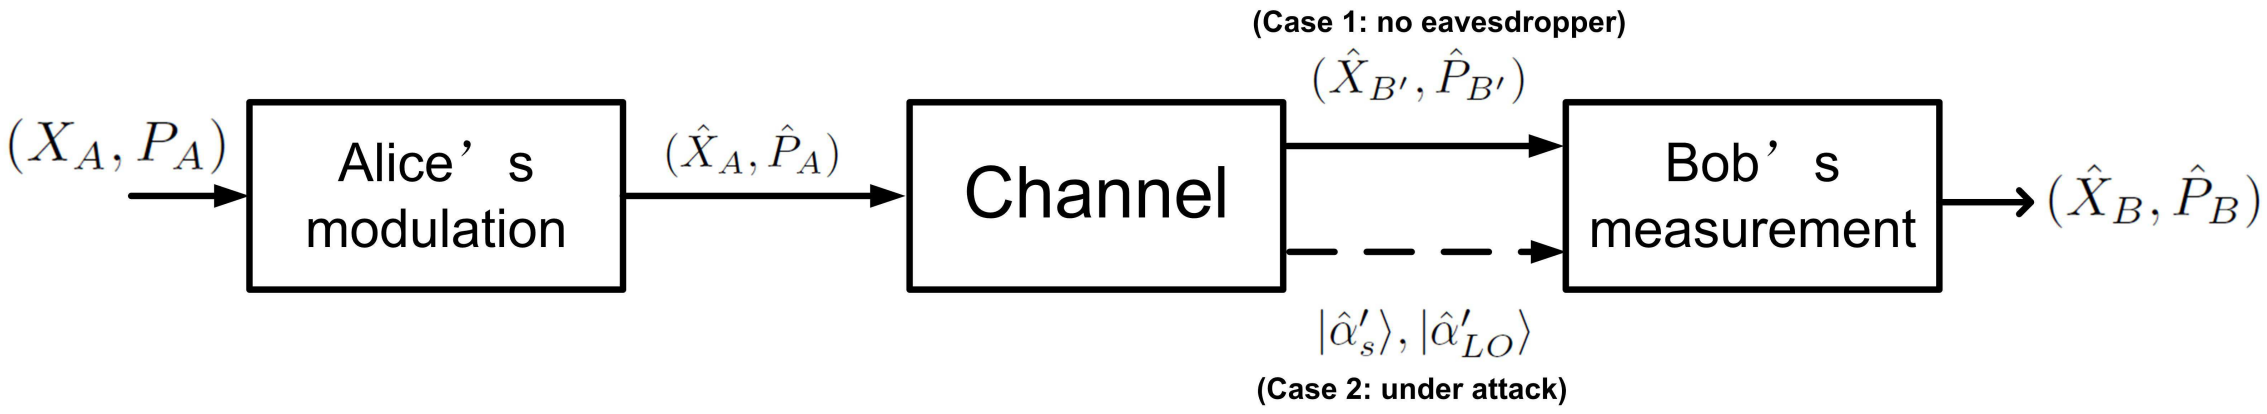

Fig. 4. The evolution of quadratures from (X_A, P_A) to $(\hat{X}_B, \hat{P}_B)$. The upper link between channel and Bob drawn in solid line represents the case of no eavesdropping, and the lower one drawn in dash line represents the case of Eve performing the wavelength attack.

since the other quadrature P can be presented in the similar way):

$$\begin{aligned} X_A \quad &\rightarrow \hat{X}_A = X_A + \hat{N}_A^x \\ &\rightarrow \hat{X}_{B'} = \sqrt{\eta}\hat{X}_A + \sqrt{1-\eta}\hat{X}_N \\ &\rightarrow \hat{X}_B = \tfrac{1}{\sqrt{2}}(\sqrt{\eta}\hat{X}_A + \sqrt{1-\eta}\hat{X}_N + \hat{N}_B^x) \\ &= \tfrac{1}{\sqrt{2}}(\sqrt{\eta}X_A + \sqrt{\eta}\hat{N}_A^x + \sqrt{1-\eta}\hat{X}_N + \hat{N}_B^x), \end{aligned} \tag{11}$$

where $\hat{X}_N$ is the amplitude quadrature of the inserted vacuum state due to the channel loss[13], and N_B^x is the vacuum noise introduced by the heterodyne detection, as we have discussed in section 2. Alice’s conditional variance of Bob’s measurement in the absent of Eve, which we denote as $V_{A|B,x}^{normal}$, can be calculated as follows:

$$\begin{aligned} V_{A|B,x}^{normal} \quad &= \langle(\hat{X}_B - \sqrt{\tfrac{\eta}{2}}X_A)^2\rangle = \tfrac{\eta}{2}\langle(\hat{N}_A^x)^2\rangle + \tfrac{1-\eta}{2}\langle(\hat{X}_N)^2\rangle + \tfrac{1}{2}\langle(\hat{N}_B^x)^2\rangle \\ &= \tfrac{1+\eta}{2}N_0 + \tfrac{1-\eta}{2}\langle(\hat{X}_N)^2\rangle. \end{aligned} \tag{12}$$

If the excess noise is negligible(e.g., only $0.06N_0$ in Ref.[15]), $V_N = \langle(\hat{X}_N)^2\rangle$ has the minimum value of 1, and $V_{A|B,x}^{normal} = 1$ holds for all η. Because Alice uses the coherent state, $V_{A|B,p}^{normal} = V_{A|B,x}^{normal} = V_{A|B}^{normal} = 1$ is then established. The relation between η and $V_{A|B}^{normal}$ is shown in Fig.3(b).

4.2. $V_{A|B}^{attack}$ *in the present of Eve*

When Eve performs the wavelength attack, the evolution of the quadrature X from X_A to $\hat{X}_B$ is written as follows (the evolution of quadrature P can be written similarly):

$$\begin{aligned} X_A \quad &\rightarrow \hat{X}_A = X_A + \hat{N}_A^x \\ &\rightarrow \hat{X}_E = \hat{X}_A + \hat{N}_E^x \\ &\rightarrow \hat{X}_B = \tfrac{1}{\sqrt{2}}(\sqrt{\eta}\hat{X}_E + \hat{X}_{E|B}) \\ &= \tfrac{1}{\sqrt{2}}(\sqrt{\eta}X_A + \sqrt{\eta}\hat{N}_A^x + \sqrt{\eta}\hat{N}_E^x + \hat{X}_{E|B}), \end{aligned} \tag{13}$$

where $\hat{N}_E^x$ is the vacuum noise in Eve’s heterodyne detection, $\hat{X}_{E|B}$ denotes the deviation of $\hat{X}_B$ from $\sqrt{\eta}\hat{X}_E$. Then we can derive Alice’s conditional variance of Bob’s measurement, which is denoted as $V_{A|B,x}^{attack}$, as:

$$\begin{aligned} V_{A|B,x}^{attack} \quad &= \langle(\hat{X}_B - \sqrt{\tfrac{\eta}{2}}X_A)^2\rangle = \tfrac{\eta}{2}\langle(\hat{N}_A^x)^2\rangle + \tfrac{\eta}{2}\langle(\hat{N}_E^x)^2\rangle + \tfrac{1}{2}\langle(\hat{X}_{E|B})^2\rangle \\ &= \eta N_0 + \tfrac{1}{2}\langle(\hat{X}_{E|B})^2\rangle = \eta N_0 + \tfrac{1}{2}V_{E|B,x}, \end{aligned} \tag{14}$$

where $V_{E|B,x}$ can be considered as Eve's conditional variance of Bob's measurement result. Similarly, $V^{attack}_{A|B,p} = \eta N_0 + \frac{1}{2}V_{E|B,p}$. Therefore $V^{attack}_{A|B}$ can be calculated by using the value of $V_{E|B}$.

To derive $V_{E|B}$, let us start from the generation of Eve's fake states. As we have described in section 3, Eve generates the fake signal sate $|\alpha'_s\rangle$ and the fake LO state $|\alpha'_{LO}\rangle$ according to her measurement result and sends them to Bob. These fake states can be described by the following operators:

$$\begin{aligned}\hat{\alpha}'_s &= \alpha'_s + \delta\hat{a}'_s,\\ \hat{\alpha}'_{LO} &= \alpha'_{LO} + \delta\hat{a}'_{LO}.\end{aligned} \tag{15}$$

Where $\delta\hat{a}'_s$ and $\delta\hat{a}'_{LO}$ represent the fluctuation of the amplitude caused by the initial vacuum noise in the modulation and are constrained by the Heisenberg relation. Therefore we have $\langle(\delta\hat{X}'_k)^2\rangle = \langle(\delta\hat{P}'_k)^2\rangle = N_0$, where $\delta\hat{X}_k = \frac{\delta\hat{a}'_s + \delta\hat{a}_s^{'\dagger}}{2}$ and $\delta\hat{P}_k = \frac{\delta\hat{a}'_k - \delta\hat{a}_k^{'\dagger}}{2i}$ (k = s, LO).

Bob performs heterodyne detection on these fake states. According to Eq.(5), Bob's BS has different intensity transmissions to $\hat{\alpha}'_s$ and $\hat{\alpha}'_{LO}$ because of their different wavelengths, which is denoted as T_1 and T_2(see condition 2 in Eq.(7)). After passing the first BS cascade, $\hat{\alpha}'_s$ is separated to $\hat{\alpha}_1$ and $\hat{\alpha}_2$, while $\hat{\alpha}'_{LO}$ is separated to $\hat{\alpha}_3$ and $\hat{\alpha}_4$, which can be derived as follows:

$$\begin{aligned}\hat{\alpha}_1 &= \sqrt{1-T_1}(\hat{\alpha}'_{LO} + \hat{N}_{LO}),\\ \hat{\alpha}_2 &= \sqrt{1-T_2}(\hat{\alpha}'_s + \hat{N}_s),\\ \hat{\alpha}_3 &= \sqrt{T_1}(\hat{\alpha}'_{LO} + \hat{N}_{LO}),\\ \hat{\alpha}_4 &= e^{i\frac{\pi}{2}}\sqrt{T_2}(\hat{\alpha}'_s + \hat{N}_s),\end{aligned} \tag{16}$$

where $\hat{N}_{LO}$, $\hat{N}_s$ are the vacuum noise inserted to the fake signal and fake LO respectively at Bob's BS. We simplify the symbols by defining $\delta\hat{\alpha}'_s \equiv \delta\hat{a}'_s + \hat{N}'_s$ and $\delta\hat{\alpha}'_{LO} \equiv \delta\hat{a}'_{LO} + \hat{N}'_{LO}$. Furthermore, we define the quadratures of $\delta\hat{\alpha}'_s$ and $\delta\hat{\alpha}'_{LO}$ by $\delta\hat{X}_{\alpha,k} = \frac{\delta\hat{\alpha}'_k + \delta\hat{\alpha}_k^{'\dagger}}{2}$ and $\delta\hat{P}_{\alpha,k} = \frac{\delta\hat{\alpha}'_k - \delta\hat{\alpha}_k^{'\dagger}}{2i}$ (k = s, LO), and the variances of these quadratures are easily to be achieved as:

$$\langle(\delta\hat{X}_{\alpha,k})^2\rangle = \langle(\delta\hat{P}_{\alpha,k})^2\rangle = 2N_0(k = s, LO). \tag{17}$$

Finally, after combining by the second BS cascade, the electromagnetic fields arrive at the four detectors can be written as:

$$\begin{aligned}\hat{b}_1 &= \sqrt{1-T_1}\hat{\alpha}_1 + \sqrt{T_2}\hat{\alpha}_2,\\ \hat{b}_2 &= \sqrt{T_1}\hat{\alpha}_1 + \sqrt{1-T_2}\hat{\alpha}_2,\\ \hat{b}_3 &= \sqrt{1-T_1}\hat{\alpha}_3 + \sqrt{T_2}\hat{\alpha}_4,\\ \hat{b}_4 &= \sqrt{T_1}\hat{\alpha}_3 + \sqrt{1-T_2}\hat{\alpha}_4.\end{aligned} \tag{18}$$

And the photocurrents $\hat{i}_k = q\hat{b}_k^\dagger\hat{b}_k$, (k=1,2,3,4).

Bob's quadrature measurement results are then derived from the difference photocurrents, using the method in section 2.1:

$$\begin{aligned}\hat{i}_x \ &= \hat{i}_1 - \hat{i}_2 = q(\hat{b}_1^\dagger\hat{b}_1 - \hat{b}_2^\dagger\hat{b}_2)\\ &= q[(1-T_1)(1-2T_1)(|\alpha'_{LO}|^2 + \alpha'^*_{LO}\delta\hat{\alpha}'_{LO} + \alpha'_{LO}\delta\hat{\alpha}'^\dagger_{LO})\\ &\quad + (1-T_1)\sqrt{(1-T_2)T_2}(\alpha'^*_{LO}\alpha'_s + \alpha'^*_{LO}\delta\hat{\alpha}'_s + \delta\hat{\alpha}'^\dagger_{LO}\alpha'_s + \delta\hat{\alpha}'^\dagger_{LO}\delta\hat{\alpha}'_s)\\ &\quad + (1-T_1)\sqrt{(1-T_2)T_2}(\alpha'^*_s\alpha'_{LO} + \alpha'^*_s\delta\hat{\alpha}'_{LO} + \delta\hat{\alpha}'^\dagger_s\alpha'_{LO} + \delta\hat{\alpha}'^\dagger_s\delta\hat{\alpha}'_{LO})\\ &\quad + (1-T_2)(2T_2-1)(|\alpha'_s|^2 + \alpha'^*_s\delta\hat{\alpha}'_s + \alpha'_s\delta\hat{\alpha}'^\dagger_s)]\end{aligned} \tag{19}$$

Notice that $\hat{\alpha}'_{LO}$ and $\hat{\alpha}'_s$ have different frequencies, the terms of $\alpha'_j\alpha'_k$, $\delta\alpha'_j\alpha'_k$ and $\delta\alpha'_j\delta\alpha'_k (j,k = s, LO; j \neq k)$ vanish during the measurement. The remaining terms compose the measurement result of $\hat{i}_x$:

$$\begin{aligned} \hat{i}_x \quad &= q[(1-T_1)(1-2T_1)(|\alpha'_{LO}|^2 + \alpha'^*_{LO}\delta\hat{\alpha}'_{LO} + \alpha'_{LO}\delta\hat{\alpha}'^{\dagger}_{LO}) \\ &+(1-T_2)(2T_2-1)(|\alpha'_s|^2 + \alpha'^*_s\delta\hat{\alpha}'_s + \alpha'_s\delta\hat{\alpha}'^{\dagger}_s)] \end{aligned} \tag{20}$$

Similarly, we get the measurement result of $\hat{i}_p$ as:

$$\begin{aligned} \hat{i}_p \quad &= \hat{i}_3 - \hat{i}_4 = q(\hat{b}^{\dagger}_3\hat{b}_3 - \hat{b}^{\dagger}_4\hat{b}_4) \\ &= q[T_1(1-2T_1)(|\alpha'_{LO}|^2 + \alpha'^*_{LO}\delta\hat{\alpha}'_{LO} + \alpha'_{LO}\delta\hat{\alpha}'^{\dagger}_{LO}) \\ &\quad + T_2(2T_2-1)(|\alpha'_s|^2 + \alpha'^*_s\delta\hat{\alpha}'_s + \alpha'_s\delta\hat{\alpha}'^{\dagger}_s)] \end{aligned} \tag{21}$$

Bob's quadratures measurement results $\hat{X}_B$ and $\hat{P}_B$ are then calculated as Eq.(3):

$$\begin{aligned} \hat{X}_B \quad &= \tfrac{\hat{i}_x}{\sqrt{2}q|\alpha_{LO}|} \\ &= \tfrac{(1-T_1)(1-2T_1)|\alpha'_{LO}|^2 + (1-T_2)(2T_2-1)|\alpha'_s|^2}{\sqrt{2}|\alpha_{LO}|} \\ &+ \tfrac{(1-T_1)(1-2T_1)(\alpha'^*_{LO}\delta\hat{\alpha}'_{LO} + \alpha'_{LO}\delta\hat{\alpha}'^{\dagger}_{LO}) + (1-T_2)(2T_2-1)(\alpha'^*_s\delta\hat{\alpha}'_s + \alpha'_s\delta\hat{\alpha}'^{\dagger}_s)}{\sqrt{2}|\alpha_{LO}|} \\ &= \sqrt{\tfrac{\eta}{2}}\hat{X}_E + \tfrac{1}{\sqrt{2}}\hat{X}_{E|B}, \\ \hat{P}_B \quad &= \tfrac{\hat{i}_x}{\sqrt{2}q|\alpha_{LO}|} \\ &= \tfrac{T_1(1-2T_1)|\alpha'_{LO}|^2 + T_2(2T_2-1)|\alpha'_s|^2}{\sqrt{2}|\alpha_{LO}|} \\ &+ \tfrac{T_1(1-2T_1)(\alpha'^*_{LO}\delta\hat{\alpha}'_{LO} + \alpha'_{LO}\delta\hat{\alpha}'^{\dagger}_{LO}) + T_2(2T_2-1)(\alpha'^*_s\delta\hat{\alpha}'_s + \alpha'_s\delta\hat{\alpha}'^{\dagger}_s)}{\sqrt{2}|\alpha_{LO}|} \\ &= \sqrt{\tfrac{\eta}{2}}\hat{P}_E + \tfrac{1}{\sqrt{2}}\hat{P}_{E|B}. \end{aligned} \tag{22}$$

Let α'_{LO} and α'_s be real, and define $\delta\hat{X}$ as the maximum value of $\delta\hat{X}_{\alpha,LO}$ and $\delta\hat{X}_{\alpha,s}$, and α be the minimum value of α'_{LO} and α'_s. Then we get the following inequalities:

$$\begin{aligned} \tfrac{1}{\sqrt{2}}\hat{X}_{E|B} \quad &= \tfrac{(1-T_1)(1-2T_1)(\alpha'_{LO}\delta\hat{\alpha}'_{LO} + \alpha'_{LO}\delta\hat{\alpha}'^{\dagger}_{LO}) + (1-T_2)(2T_2-1)(\alpha'_s\delta\hat{\alpha}'_s + \alpha'_s\delta\hat{\alpha}'^{\dagger}_s)}{\sqrt{2}|\alpha_{LO}|} \\ &< \sqrt{\tfrac{\eta}{2}}\hat{X}_E\tfrac{\delta X}{\alpha}, \\ \tfrac{1}{\sqrt{2}}\hat{P}_{E|B} \quad &= \tfrac{T_1(1-2T_1)(\alpha'_{LO}\delta\hat{\alpha}'_{LO} + \alpha'_{LO}\delta\hat{\alpha}'^{\dagger}_{LO}) + T_2(2T_2-1)(\alpha'_s\delta\hat{\alpha}'_s + \alpha'_s\delta\hat{\alpha}'^{\dagger}_s)}{\sqrt{2}|\alpha_{LO}|} \\ &< \sqrt{\tfrac{\eta}{2}}\hat{P}_E\tfrac{\delta P}{\alpha}. \end{aligned} \tag{23}$$

Therefore,

$$\begin{aligned} V_{E|B,x} &= \langle(\hat{X}_{E|B})^2\rangle < \tfrac{\eta}{2}V^x_E\tfrac{\langle(\delta X)^2\rangle}{|\alpha|^2}, \\ V_{E|B,p} &= \langle(\hat{P}_{E|B})^2\rangle < \tfrac{\eta}{2}V^p_E\tfrac{\langle(\delta P)^2\rangle}{|\alpha|^2}. \end{aligned} \tag{24}$$

It is reasonable to set $V_E \approx V_A = 100N_0$ and $|\alpha_{LO}|^2 = 10^8 N_0\eta$ in the practical implements, as in Ref.[15]. In this expression, we can easily achieve that $\alpha^2 \in (N_0, 5\times 10^7\eta N_0)$, according to the constraint condition 1 in Eq.(7). Therefore Eve can set the value of α to be sufficient large in order to make $V_{E|B}$ sufficient small. For instance, if we make $\alpha = 2\times 10^3$, then $V_{E|B} < 2\times 10^{-3}V_E \approx \frac{1}{5}N_0$. Combining with Eq.(14), we then derive that $V_{A|B} < (\eta + \frac{1}{10})N_0$. Hence we achieve that $V^{attack}_{A|B} < (\eta + \frac{1}{10})N_0$. The relation between η and $V^{attack}_{A|B}$ is described in Fig.3(c).

We can see from Fig.3 that $V_{A|B}^{attack}$ is always smaller than $V_{A|B}^{max}$, and $V_{A|B}^{attack} < V_{A|B}^{normal}$ holds when $\eta < 0.9$. As we have discussed in the beginning of this section, the result $V_{A|B}^{attack} < V_{A|B}^{max}$ indicates that Alice and Bob can not notice the present of Eve, therefore our attack renders their final key insecure. The feasibility of our attack is proved.

5. Discussions

There are several points about the wavelength attack should be remarked:
(1) As shown in fig.3, $V_{A|B}^{attack} < N_0$ when $\eta < 0.9$. It is impossible when the protocol works normally, and Eve should add extra noise on her measurement result to increase $V_{A|B}^{attack}$. That means Eve's heterodyne detection does not need to be perfect, and assumption 3 listed in section 4 can be compromised.
(2) It is a little surprising that $I_{AE} > I_{AB}$. That is because $V_{E|B}$ is smaller than $V_{A|B}$, which means Eve guesses Bob's measurement result more precisely than Alice does. Therefore Eve can make the hole key shared by Alice and Bob insecure.
(3) To be aware of our attack, Bob should not only add a BS and monitor the intensity[19] but also add a wavelength filter before his detection.

In conclusion, we have proposed a new type of realistic attack, the wavelength attack, for continuous-variable QKD system implementing the heterodyne protocol. We have shown that when Alice and Bob are unaware of our attack, the final key shared between them is insecure and Eve has all information about the key. Different from the powerful equal-amplitude attack proposed in Ref.[20], in the wavelength attack Eve has the ability to control Bob's BS and the suggestion of testing the total intensity in Ref.[20] can not prevent our attack. Our attack is practical for Eve to implement. Therefore, it is important for Alice and Bob to be aware of our attack and monitor the intensity of both signal and LO as well.

Acknowledgements

This work was supported by the National Basic Research Program of China (Grants No. 2011CBA00200 and No. 2011CB921200), National Natural Science Foundation of China (Grants No. 60921091 and No. 61101137), and China Postdoctoral Science Foundation (Grant No. 20100480695).

References

1. N. Gisin, G. Ribordy, W. Tittel and H. Zbinden, *Rev. Mod. Phys.* **74,** 145 (2002).
2. Hoi-Kwong Lo, H. F. Chau, *Science* **283**, 5410 (1999).
3. W. Shor, J. Preskill, *Phys. Rev. Lett.* **85,** 441 (2000).
4. C. H. Bennett, G. Brassard, in *Proceedings IEEE Int. Conf. on Computers, Systems and Signal Processing, Bangalore, India* (IEEE, New York, 1984), pp. 175-179, (1984)
5. L. Lydersen, C. Wiechers, C. Wittmann, D. Elser, J. Skaar and V. Makarov. *Nature Photonics* **4** 686-689.
6. F. Xu, B. Qi and H. -K. Lo *New J.Phys.* **12** 113026 (2010).
7. H. Weier, H. Krauss, M. Rau, M. Fuerst, S. Nauerth and H. Weinfurter, *New J. Phys.* **13,** 073024 (2011).
8. N. Jain, C. Wittmann, L. Lydersen, C. Wiechers, D. Elser, C. Marquardt, V. Makarov, and G. Leuchs , *Phys. Rev. Lett.* **107,** 110501(2011).

9. S. Sun, M. Jiang, and L. Liang, *Phys. Rev. A.* **83,** 062331 (2011)
10. S. Sun, M. Gao, M. Jiang, C. Li, and L. Liang, *Phys. Rev. A.* **85,** 032304 (2012)
11. H. Li, et al., *Phys.Rev.A.* **84,** 062308 (2011).
12. F. Grosshans, G.Assche, J. Wenger, et al., *Nature.* **421,** 238 (2003).
13. C. Weedbrook, et al., *Phys. Rev. Lett.* **93,** 170504 (2004); C. Weedbrook, et al., *Phys. Rev. A.* **73,** 022316 (2006).
14. G. V. Assche, J. Cardinal, and N. J. Cerf, *IEEE Trans. Inf. Theory.* **50,** 394(2004); M. Bloch, A. Thangaraj, and S. W. McLaughlin, cs.IT/0509041.
15. J. Lodewyck, T. Debuisschert, R. Tualle-Brouri, P. Grangier, *Phys. Rev. A.* **72,** 050303 (2005).
16. F. Grosshans, N. Cerf, J. Wenger, R. Tualle-Brouri, and P. Grangier, *Quantum Inf. Comput.* **3,** 535 (2003).
17. F. Grosshans, N. J. Cerf, *Phys.Rev.Lett.* **92,** 047905 (2004).
18. J. Lodewyck, and P. Grangier, *Phys. Rev. A.* **76,** 022332 (2007).
19. V. Scarani and C. Kurtsiefer, arXiv:0906.4547v2(2012).
20. H. Häseler, T. Moroder and N. Lütkenhaus, *Phy. Rev. A.* **77,** 032303 (2008).
21. M. Eisenmann and E. Weidel, *J. Lightwave Tech.* **6,** 8588-8594 (2010).
22. A. Ankiewicz, et al., *J.Lightwave Tech.* **4(9),** pp1317-1323 (1986).
23. V. Tekippe, *Fiber and Integrated Optics.* **9(2),** pp97-123 (1990).
24. S. Fossier, E. Diamanti, T. Debuisschert, et al, *New. J. Phys.* **11,** 045023 (2009).
25. J. Lodewyck, et al., *Phys. Rev. A.* **98,** 030503 (2007).
26. J. Lodewyck, et al., *Phys. Rev. A.* **76,** 042305 (2007).
27. S. Braunstein and P. van Loock, *Rev. Mod. Phys.* **77,** 513 (2005).
28. H. Bachor and T. Ralph, "A Guide to Experiments in Quantum Optics", 2nd Edition, WILEY-VCH Press (2003).